



C 417

- **Extremely light, inconspicuous lavalier microphone**
- **Two color versions for almost invisible use on artist's skin**



Affordable professional miniature condenser microphone. Its broadband, flat audio reproduction in an omnidirectional format is ideal for all types of broadcast and theatrical applications. The sound is extremely open and natural, making it ideal for wireless or hardwire multi-mic situations. An attachment clip, tiepin, and windscreen are supplied with each C 417.

C 417 PP: For hardwire applications, with standard XLR connector for phantom powering.



C 417 L: With mini XLR connector for use with B 29 L battery operated power supply, MPA III L external phantom power adapter, or AKG WMS bodypack transmitters.

Specifications

Polar pattern	omnidirectional
Frequency range	20 to 20,000 Hz
Sensitivity	10 mV/Pa (-40 dBV)
Max. SPL	118/126 dB (for 1%/3% THD)
Equivalent noise level	34 dB-A
Signal/noise ratio (A-weighted)	60 dB
Impedance	200 ohms
Recommended load impedance	1000 ohms
Supply voltage	9 to 52 V phantom power to DIN 45596 or battery powering from B 29 L or AKG bodypack transmitters

Current consumption	approx. 2.2 mA
Connector	C 417 PP: 3-pin XLR, C 417 L: 3-pin mini XLR
Cable	C 417 PP: 3 m (10 ft.), C 417 L: 1.5 m (5 ft.)
Finish	matte black
Dimensions	7.5 dia. x 15 mm / 0.3 x 0.6 in.
Net weight	C 417 PP: 68 g / 2.4 oz., C 417 L: 8 g / 0.3 oz.
Shipping weight	C 417 PP: 220 g / 8.1 oz., C 417 L: 160 g / 5.9 oz.

Graphical data

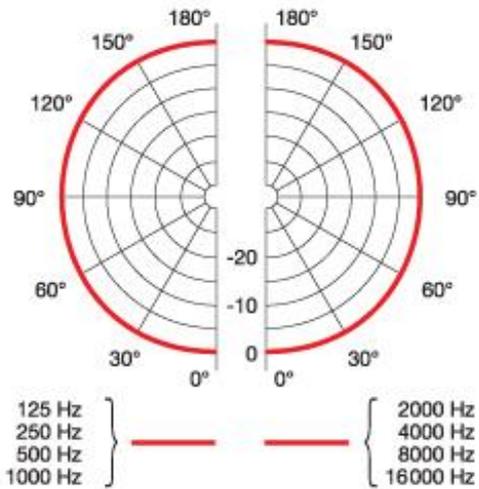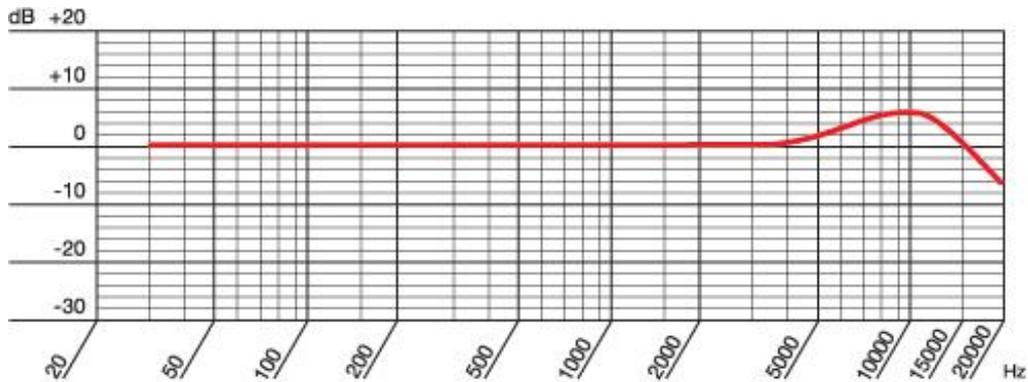

C 417