



# evolution wireless G4

## ew 500 BOOM G4

### Pro Camera Plug-on Transmitter set



The professional's choice for broadcast quality sound  
Providing the highest flexibility for your video sound and field recording applications. A robust wireless microphone system that offers ultimate sound quality, simple mounting and ease of use.

The phantom power-equipped SKP 500 plug-on transmitter adapts any wired shotgun or handheld microphone for a wide range of wireless applications, from field interviews to off-camera boom work.

#### FEATURES

- Highly versatile solution for professional film sound: Rugged all-in-one wireless system for professional interviews and recording
- Professional sound and excellent construction quality
- Easy to use and fast setup time
- Easy and flexible wireless synchronisation between transmitter and receiver via infrared
- With 48 V phantom powering
- Up to 88 MHz bandwidth, up to 32 channels
- Range: up to 100 meters / 330 feet
- Increased RF output power (10/30/50 mW)
- Up to 8 hours of operation time

#### DELIVERY INCLUDES

- EK 500 G4 camera receiver
- SKP 500 G4 pro plug-on transmitter
- 4 AA batteries
- CL 1 3.5 mm jack cable
- CL 500 XLR to 3.5 mm jack adapter cable
- CA 2 camera adapter
- quick guide
- safety guide
- manufacturer declaration sheet



# evolution wireless G4

## ew 500 BOOM G4

### Pro Camera Plug-on Transmitter set

#### PRODUCT VARIANTS

|                           |                 |                 |
|---------------------------|-----------------|-----------------|
| <b>ew 500 BOOM G4-Aw+</b> | 470 - 558 MHz   | Art. no. 509547 |
| <b>ew 500 BOOM G4-AS</b>  | 520 - 558 MHz   | Art. no. 509599 |
| <b>ew 500 BOOM G4-Gw1</b> | 558 - 608 MHz   | Art. no. 509554 |
| <b>ew 500 BOOM G4-Gw</b>  | 558 - 626 MHz   | Art. no. 509601 |
| <b>ew 500 BOOM G4-GBw</b> | 606 - 678 MHz   | Art. no. 509903 |
| <b>ew 500 BOOM G4-Bw</b>  | 626 - 698 MHz   | Art. no. 509540 |
| <b>ew 500 BOOM G4-Cw</b>  | 718 - 790 MHz   | Art. no. 509602 |
| <b>ew 500 BOOM G4-Dw</b>  | 790 - 865 MHz   | Art. no. 509603 |
| <b>ew 500 BOOM G4-JB</b>  | 806 - 810 MHz   | Art. no. 509600 |
| <b>ew 500 BOOM G4-K+</b>  | 925 - 937.5 MHz | Art. no. 509902 |

#### SPECIFICATIONS

##### EK 500 G4

###### RF characteristics

|  |   |
|--|---|
| Modulation                             | Wideband FM   |
| Frequency ranges                       | Aw+: 470 - 558 MHz<br>AS: 520 - 558 MHz<br>Gw1: 558 - 608 MHz<br>Gw: 558 - 626 MHz<br>GBw: 606 - 678 MHz<br>Bw: 526 - 698 MHz<br>Cw: 718 - 790 MHz<br>Dw: 790 - 865 MHz<br>JB: 806 - 810 MHz<br>K+: 925 - 937.5 MHz |
| Receiving frequencies                  | Max. 3520 receiving frequencies, adjustable in 25 kHz steps<br><br>20 frequency banks, each with up to 32 factory-pre-set channels, no intermodulation<br><br>6 frequency banks with up to 32 programmable channels |
| Switching bandwidth                    | up to 88 MHz  |
| Nominal/peak deviation                 | ±24 kHz / ±48 kHz   |
| Receiver principle                     | Adaptive diversity  |
| Sensitivity (with HDX, peak deviation) | < 1.6 µV for 52 dBA <sub>eff S/N</sub>  |
| Adjacent channel selection             | Typically ≥ 65 dB   |
| Intermodulation attenuation            | Typically ≥ 65 dB   |
| Blocking                               | ≥ 70 dB   |

|                    |   |
|--------------------|---|
| Squelch            | low: 5 dBµV<br>middle: 15 dBµV<br>high: 25 dBµV |
| Pilot tone squelch | Can be switched off                             |

###### AF characteristics

|   |  |
|---|--|
| Compander system                                | Sennheiser HDX                                     |
| Signal-to-noise ratio (1 mV, peak deviation)    | Line: ≥ 110 dBA<br>Phones: approx. 90 dBA          |
| Total harmonic distortion (THD)                 | ≤ 0.9 %  |
| AF output voltage (at peak deviation, 1 kHz AF) | 3.5 mm jack socket:<br>+17 dBu<br>(mono, balanced) |
| Adjustment range of audio output level          | 42 dB,<br>adjustable in steps of 6 dB              |

###### Overall device

|                          |  |
|--------------------------|--|
| Temperature range        | -10 °C to +55 °C   |
| Power supply             | 2 AA batteries, 1.5 V or BA 2015 accupack                                    |
| Nominal voltage          | 3 V battery /<br>2.4 V rechargeable battery                                  |
| Current consumption      | at nominal voltage:<br>typ. 140 mA<br>with receiver switched off:<br>≤ 25 µA |
| Operating time           | Typically 8 h  |
| Dimensions               | Approx. 82 x 64 x 24 mm  |
| Weight (incl. batteries) | approx. 130 g  |



# evolution wireless G4

## ew 500 BOOM G4

### Pro Camera Plug-on Transmitter set

#### SPECIFICATIONS

##### SKP 500 G4

| RF characteristics             |  |
|--------------------------------|--|
| Modulation                     | Wideband FM  |
| Frequency ranges               | Aw+: 470 - 558 MHz<br>AS: 520 - 558 MHz<br>Gw1: 558 - 608 MHz<br>Gw: 558 - 626 MHz<br>GBw: 606 - 678 MHz<br>Bw: 526 - 698 MHz<br>Cw: 718 - 790 MHz<br>Dw: 790 - 865 MHz<br>JB: 806 - 810 MHz<br>K+: 925 - 937.5 MHz            |
| Transmission frequencies       | Max. 3520 frequencies,<br>adjustable in 25 kHz steps<br><br>20 frequency banks, each<br>with up to 32 factory-pre-<br>set channels, no intermo-<br>dulation<br><br>6 frequency banks with<br>up to 32 programmable<br>channels |
| Switching bandwidth            | up to 88 MHz   |
| Nominal/peak deviation         | $\pm 24$ kHz / $\pm 48$ kHz  |
| Frequency stability            | $\leq \pm 15$ ppm  |
| RF output power at 50 $\Omega$ | switchable:<br>Low: typ. 10 mW<br>Standard: typ. 30 mW<br>High: typ. 50 mW   |
| Pilot tone squelch             | Can be switched off  |

##### AF characteristics

|   |                                    |
|---|------------------------------------|
| Compander system                                | Sennheiser HDX                     |
| AF frequency response                           | 80 - 18,000 Hz                     |
| Signal-to-noise ratio (1 mV,<br>peak deviation) | $\geq 120$ dBA                     |
| Total harmonic distortion<br>(THD)              | $\leq 0.9$ %                       |
| Max. input voltage                              | 6 V <sub>eff</sub>                 |
| Input impedance                                 | 68 k $\Omega$ , unbalanced         |
| Input capacitance                               | Switchable                         |
| Setting range for input<br>sensitivity          | 48 dB,<br>adjustable in 6 dB steps |

##### Overall device

|                          |   |
|--------------------------|---|
| Temperature range        | -10 °C to +55 °C  |
| Power supply             | 2 AA batteries, 1.5 V or<br>BA 2015 accupack  |
| Nominal voltage          | 3 V battery /<br>2.4 V rechargeable battery   |
| Current consumption      | at nominal voltage:<br>typ. 210 mA<br>with transmitter switched<br>off: $\leq 25$ $\mu$ A |
| Operating time           | Typically 8 h   |
| Dimensions               | Approx. 105 x 43 x 43 mm  |
| Weight (incl. batteries) | approx. 195 g   |




# evolution wireless G4

## ew 500 BOOM G4

### Pro Camera Plug-on Transmitter set



#### DIMENSIONS

##### EK 500 G4

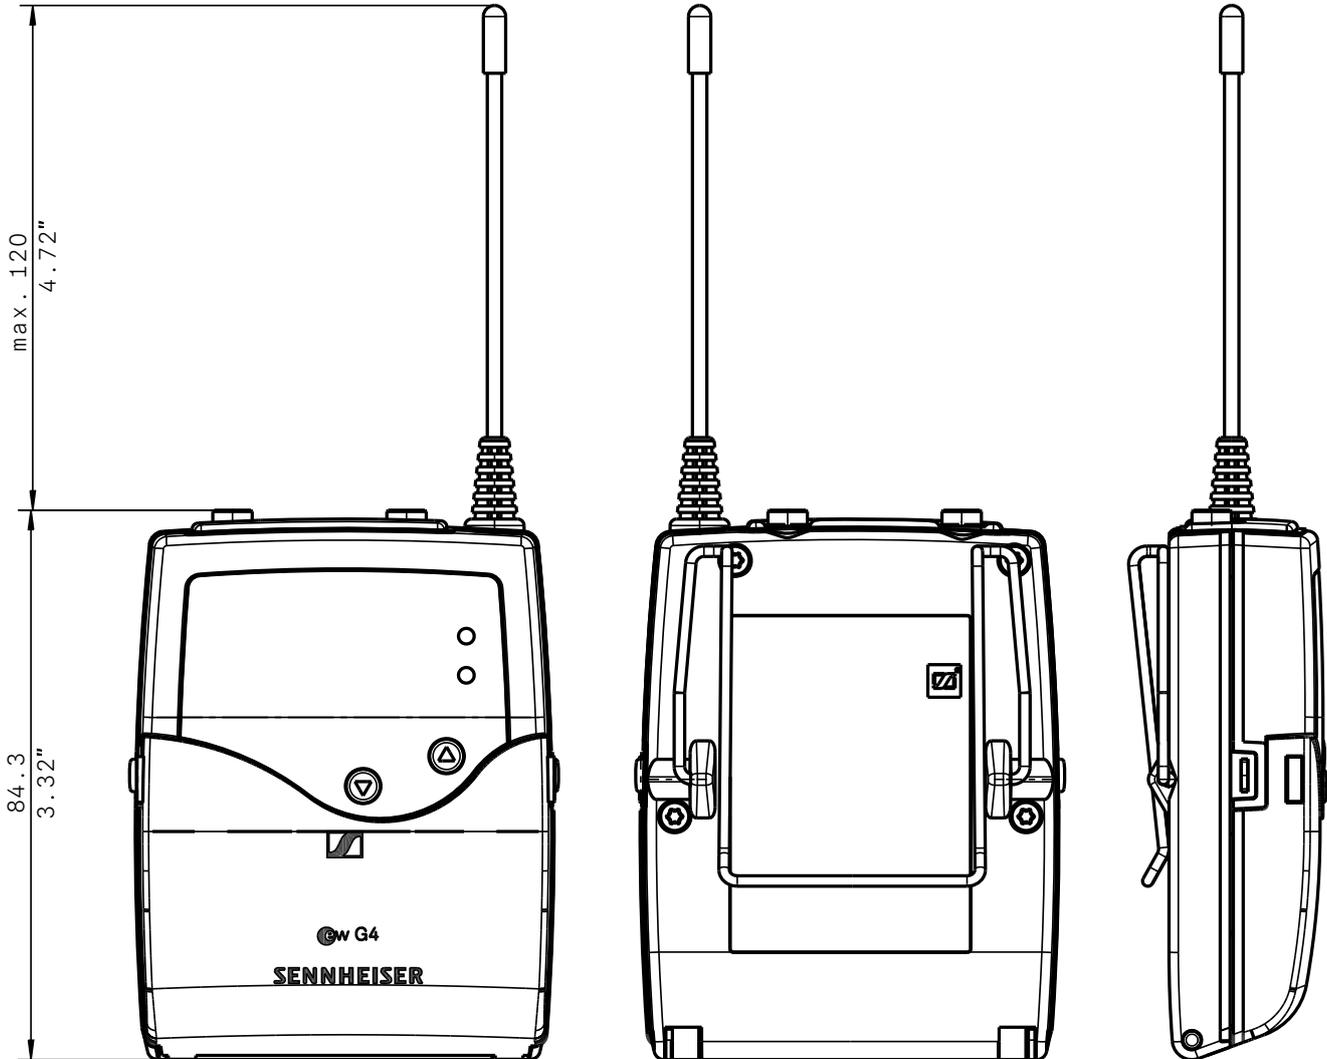

3,5mm Klinke  
3,5mm plug

3,5mm Klinke, symmetrisch  
3,5mm plug, symmetrical



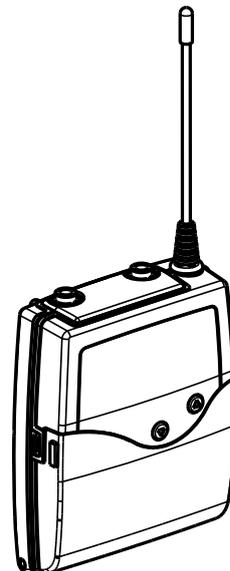
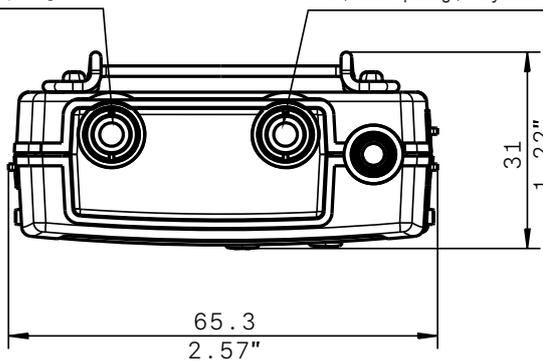




# evolution wireless G4 ew 500 BOOM G4 Pro Camera Plug-on Transmitter set

## DIMENSIONS

SKP 500 G4

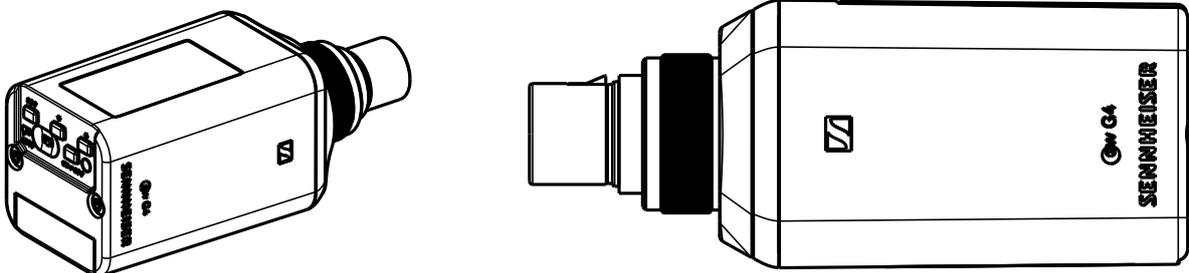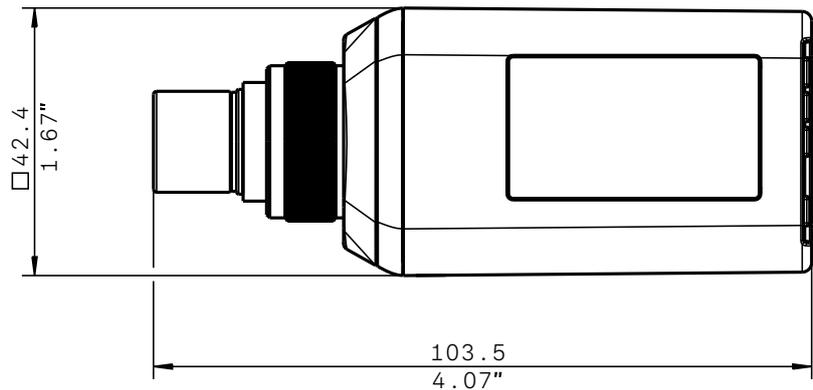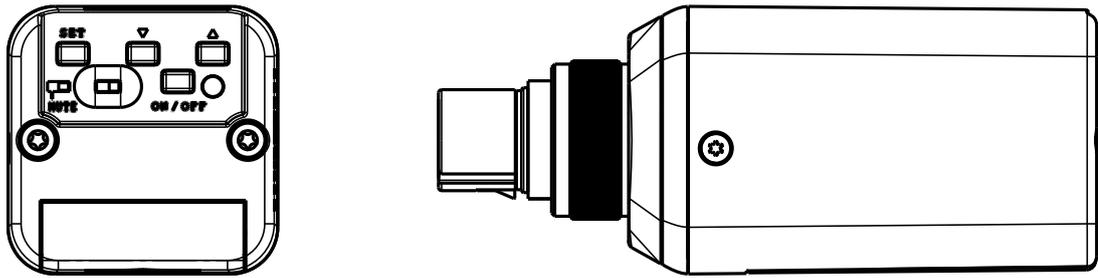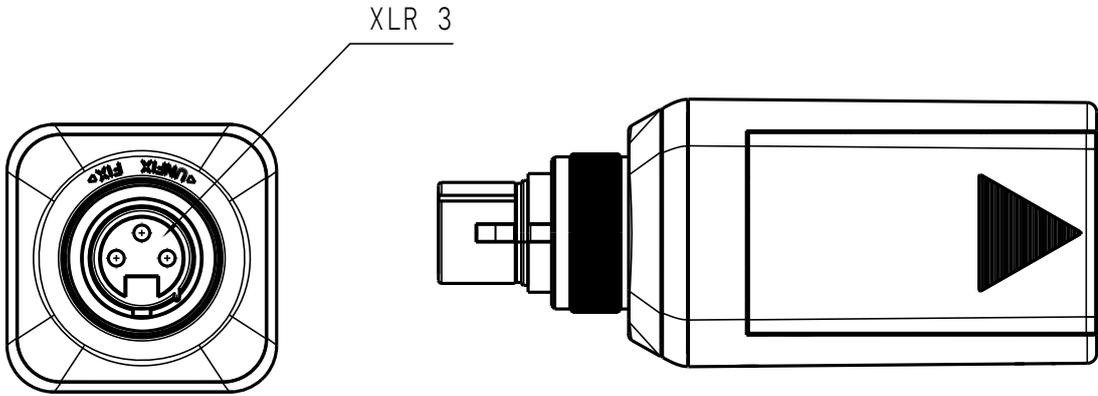



# evolution wireless G4

## ew 500 BOOM G4

### Pro Camera Plug-on Transmitter set

#### ARCHITECT'S SPECIFICATION

A wireless RF transmission system consisting of a compact camera receiver, a bodypack transmitter with a condenser clip-on microphone and a plug-on transmitter

The system shall operate within ten UHF frequency ranges, with a switching bandwidth of up to 88 MHz: 470 – 558 MHz, 520 – 558 MHz, 558 – 608 MHz, 558 – 626 MHz, 606 – 678 MHz, 626 – 698 MHz, 718 – 790 MHz, 790 – 865 MHz, 806 – 810 MHz, 925 – 937.5 MHz; receiving frequencies shall be 3520 per range and shall be tunable in 25 kHz steps. The system shall feature 20 fixed frequency banks with up to 32 compatible frequency presets and 6 user banks with up to 32 user programmable frequencies.

The receiver shall be menu-driven with a backlit LC display showing the current frequency, frequency bank and channel number, metering of RF level, metering of AF level, lock status, battery status, muting function or line output level, and pilot tone evaluation. An auto-lock feature shall be provided to prevent settings from being accidentally altered.

The receiver parameters shall either be configurable in the associated transmitter's menu and synchronized with the receiver via an integrated infrared interface or shall be programmable in the receiver menu.

The receiver shall feature a 3.5 mm audio output with a maximum output of +17 dBu (mono, balanced) and a 3.5 mm phone output.

Nominal/peak deviation shall be  $\pm 24$  kHz/ $\pm 48$  kHz. Squelch threshold shall be defeatable (off) or adjustable to three levels: Low (5 dB $\mu$ V), Middle (15 dB $\mu$ V) and High (25 dB $\mu$ V).

The receiver shall incorporate the Sennheiser HDX compander system and a defeatable pilot tone squelch. Sensitivity shall be  $< 1.6$   $\mu$ V for 52 dBA eff S/N with HDX engaged at peak deviation. Adjacent channel rejection shall be  $\geq 65$  dB (typical). Intermodulation attenuation shall be  $\geq 65$  dB (typical); blocking shall be  $\geq 70$  dB. Signal-to-noise ratio at 1 mV and peak deviation shall be  $\geq 110$  dBA (line) or approximately 90 dbA (phones). Total harmonic distortion (THD) shall be  $\leq 0.9$  %. The audio output level shall be adjustable within a 42 dB range in steps of 6 dB.

Power shall be supplied to the receiver by two 1.5V AA size batteries or by one Sennheiser BA 2015 rechargeable accupack. Nominal voltage shall be 2.4 V, current consumption shall be typical 140 mA at nominal voltage;  $\leq 25$   $\mu$ A when receiver is switched off. Operating time shall be typical 8 hours. The receiver shall have a rugged metal housing; dimensions shall be approximately 82 x 64 x 24 mm (3.23" x 2.52" x 0.94"). Weight including the batteries shall be approximately 130 grams (0.29 lbs). Operating temperature shall range from  $-10$  °C to  $+55$  °C ( $+14$  °F to  $+131$  °F).

The receiver shall be the Sennheiser EK 500 G4.

The plug-on transmitter shall be menu-driven with a backlit LC display showing the current frequency, frequency bank and channel number, metering of AF level, lock status, pilot tone evaluation, muting function, and battery status. An auto-lock feature shall be provided to prevent settings from being accidentally altered.

Some plug-on transmitter parameters such as receiving frequency, plug-on transmitter name and pilot tone setting shall be synchronizable with the associated plug-on transmitter via an integrated infrared interface.

The plug-on transmitter shall be equipped with a mute switch, which shall be switchable between "AF on/off", "RF on/off" and "Disabled" via the user interface. The plug-on transmitter shall feature an Audio-XLR-3F connector.

Via the "PhantomPower 48V" menu item, the 48 V phantom powering for condenser microphones shall be switchable between "Active" and "Inactive".

Nominal/peak deviation shall be  $\pm 24$  kHz/ $\pm 48$  kHz. Frequency stability shall be  $\leq \pm 15$  ppm. RF output power at 50  $\Omega$  shall be switchable between 10 mW (typical, low) and 30 mW (typical, standard) and 50 mW (typical, high).

The plug-on transmitter shall incorporate the Sennheiser HDX compander system and a defeatable pilot tone squelch. Audio frequency response shall range from 80 – 18,000 Hz. Signal-to-noise ratio at 1 mV and peak deviation shall be  $\geq 120$  dBA. Total harmonic distortion (THD) shall be  $\leq 0.9$  %.

The plug-on transmitters max. input voltage shall be 6 Veff; the unbalanced input impedance shall be 6 k $\Omega$ ; the input capacitance shall be switchable. The input sensitivity shall be adjustable within a 48 dB range in steps of 6 dB.

Power shall be supplied to the plug-on transmitter by two 1.5V AA size batteries or by one Sennheiser BA 2015 rechargeable accupack. Nominal voltage shall be 2.4 V, current consumption shall be typical 210 mA at nominal voltage;  $\leq 25$   $\mu$ A when plug-on transmitter is switched off. Operating time shall be typical 8 hours. The plug-on transmitter shall have a rugged metal housing; dimensions shall be approximately 105 x 43 x 43 mm (4.13" x 1.69" x 1.69"). Weight including the batteries shall be approximately 195 grams (0.43 lbs). Operating temperature shall range from  $-10$  °C to  $+55$  °C ( $+14$  °F to  $+131$  °F).

The plug-on transmitter shall be the Sennheiser SKP 500 G4.